

**Руководство
по эксплуатации**

VOICE plus /



www.altoproaudio.com

1.0 2003

- -



ON:
OFF:

WARNING:

CAUTION:

(Fuse)

(, ,).

« ».

1.

!

«ALTO VOICE plus»

«ALTO».

,

, , ..., , !.

«ALTO»

,

,

-

«

» ()

,

()

7 .

,

«ALTO»

,

,

,

.

,

!

-

«VOICE plus»

,

,

.

,

, , « »

,

;

«VOICE plus»,

.

,

«VOICE plus»

«ALTO»,

,

,

, ,

.

2.


- ③
- ③
- ③
- ③
- ③
- ③
- ③

19

+48

3.


3.1.

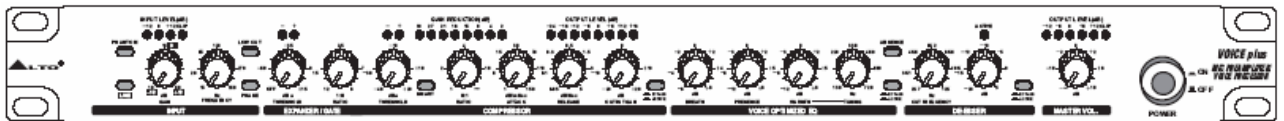

5

1.

3.1.1.

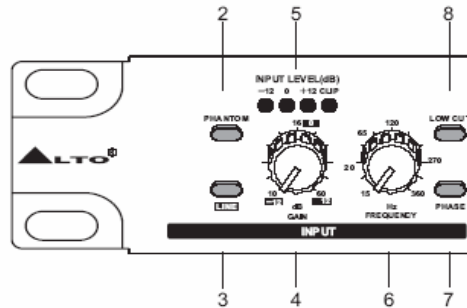

2.

+48

3.

«LINE» () .

- « » (UP)

; « »

(DOWN)

4.

(GAIN).

«LINE»,

-12 +12 ,

5.

« » (INPUT LEVEL).

4-

« »

6.

(FREQUENCY).

« »-

15

360 ,

7. (PHASE).


(180) ,

8. « »-

« »-

18 /

3.1.2.

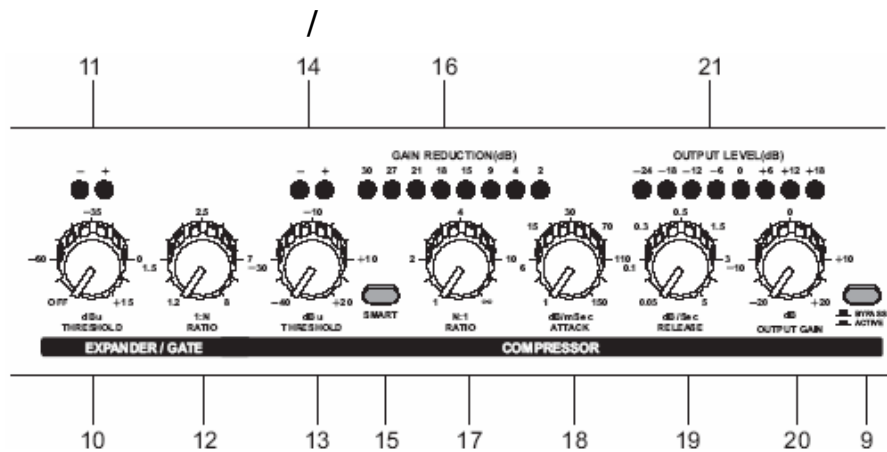

9.

».

« / »

10. (THRESHOLD).

« » (OFF) +15

11.

«+»

/ «-»

12. (RATIO).

1:1.2 1:8 (

1:8

).

13.

-40 +20 (SKC),

10

14.

2 /

«-».

«+»,

15. «SMART».

« » (SKC).

«SKC».

16.

17.

1:1 :1.

18.

150 /

19.

(Release).


20.

0.05 / 5 /

21.

-24 +18

3.1.3.

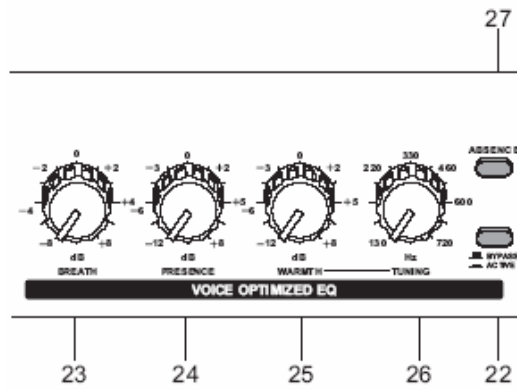

22.

23.

24.

+8

25.

«WARMTH».

-12

26.

27.

- 130 720

- 2 30

1 /

20

27


« » 8

« »-

1.2 -12

4 4

3.1.4.

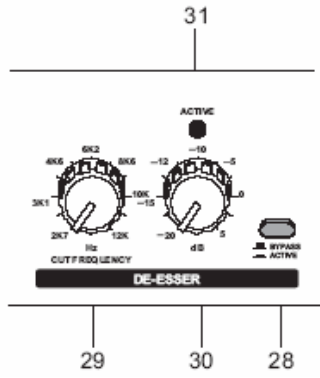


28.

29.

30.

31.

3.1.5.

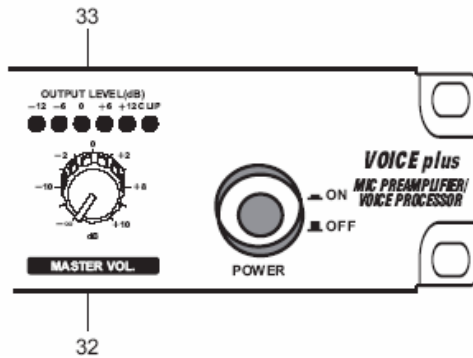


32.

33.

+12


3.2.

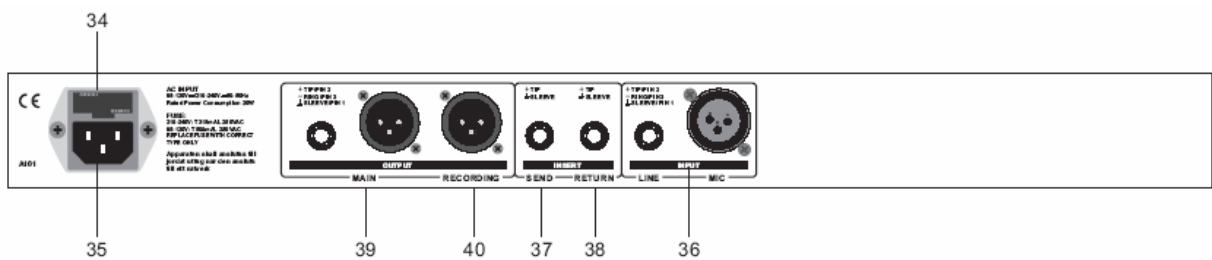


34.

/

3

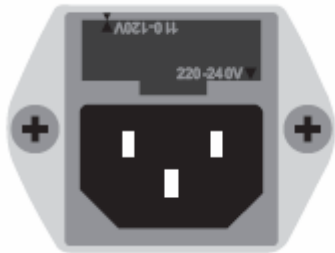

110-120V.

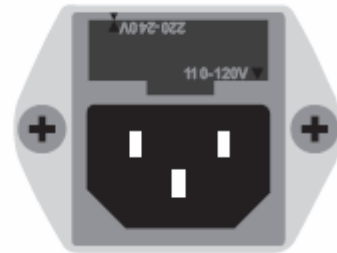

220-240V.

180°

35.

36.

37.

38.

39.

40.

4.

4.1.

4.2.

1/4

«TRS»

«XLR»

1/4

«XLR»

«TRS»

1/4

«XLR»

«DAT»

2


«VOICE plus»

«XLR»,


1/4

«Jack»


¼



«TRS»




«TRS»



TRS»

«XLR».




2 (+)
3 (-)

1 (ш)

1

, ш)

«XLR».





2 (+)

3 (-)

1 (ш)


«

«XLR».

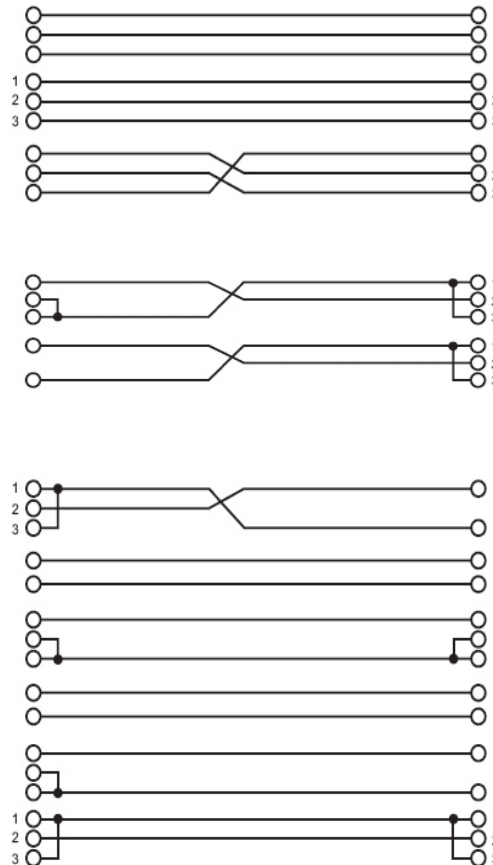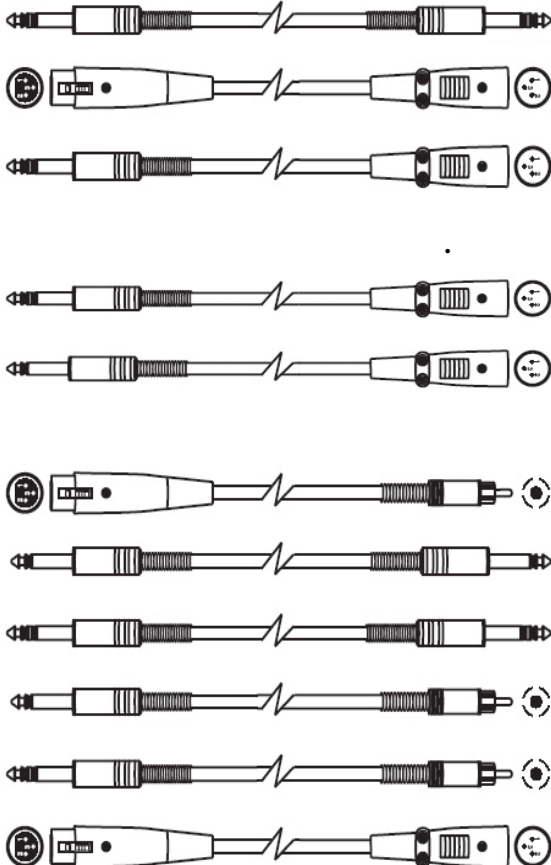



« » (SEN) « » (RETURN),
 « »-

«TRS»



. 14. «

».

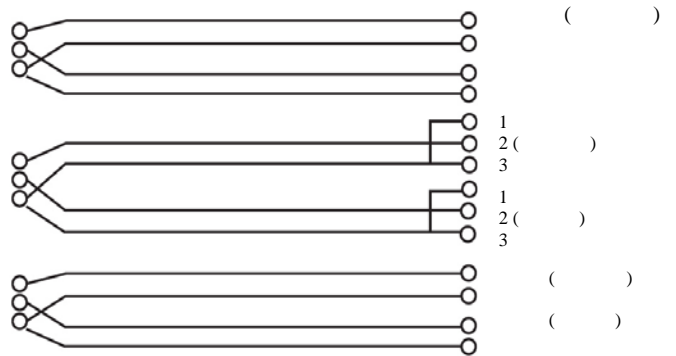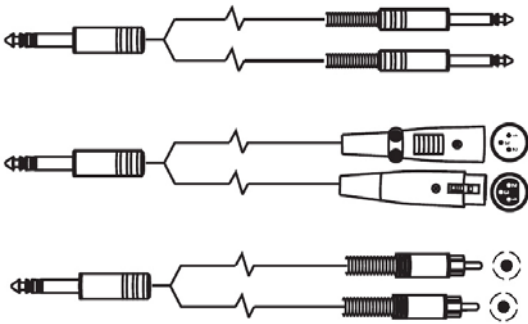

4.3.

19-

4 ()

«VOICE plus»

5.

«VOICE plus»

« » (Input)

«LINE»


« »;

«VOICE plus»,

« »-

15 (12 « »)
«VOICE plus»

«VOICE plus»

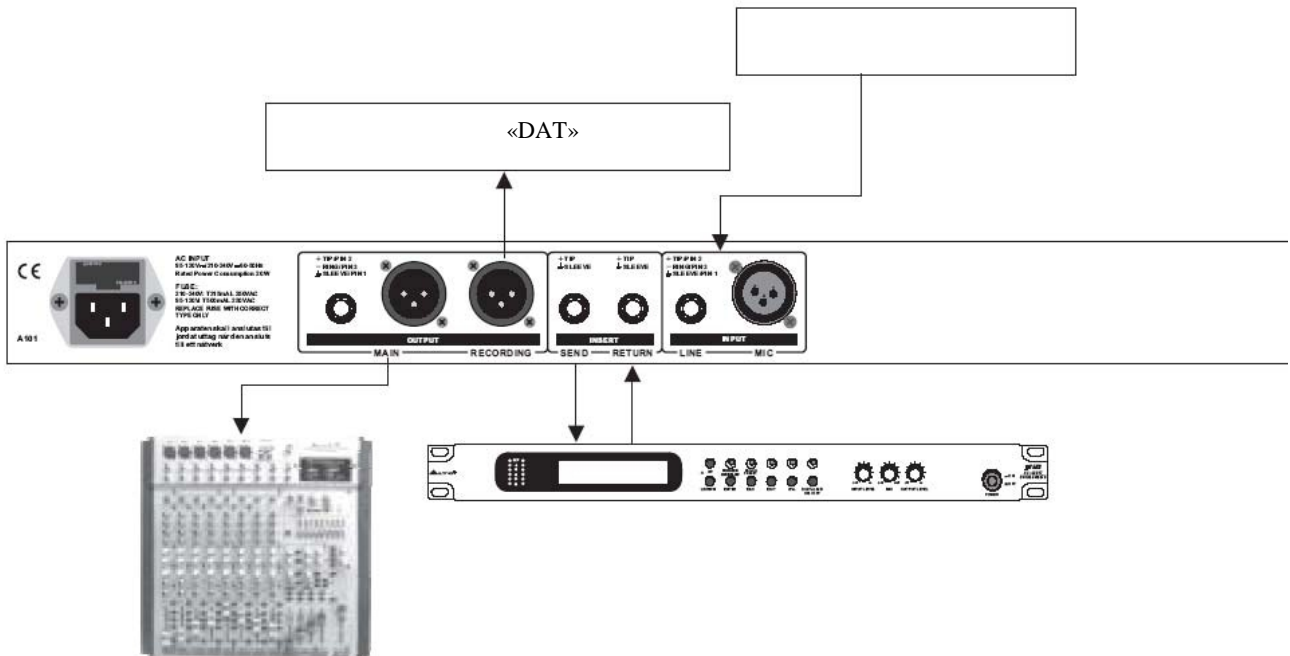

6.

	« »	10 50 : +0/-2
	« »	<0.01% / -30 /30 <0.01% 0 /
	(.)	-88 -100
(max)		+11.7 +22.7
(max)	() ()	+22 +22 +22 +22
		: 230 . , 50 200 max 100-120 : 500 200-240 : 315
	(× ×)	44.5 × 482 × 217 3.3 4.1

