





ColorMix 250 AT



- **Lamp:** MSD 250/2 compact high-pressure metal halide lamp, automatic and remote On/Off
- **Ballast:** Magnetic
- **Colour system:** Full CMY
- **Zoom:** Manual 8° - 22°
- **Colour wheel:** 3 dichro filters, 3200K and 5600K correction filters, UV filter + open
- **Effect wheel:** Beam shaper, frost filter
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Display:** 4-digit LED
- **Operation modes:** Stand-alone, DMX operation, Master/Slave
- **Control channels:** 10, 11 DMX
- **Accessories:** Barn doors, removable stand




Dimensions:
Height = 353 mm (13.9")
Width = 410 mm (16.1")
Depth = 377 mm (14.8")
Weight - EU model: 13.5 kg (29.8 lbs)
Weight - US model: 16 kg (35.3 lbs)

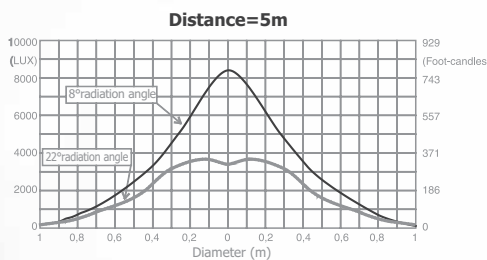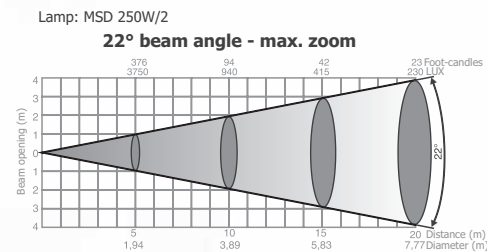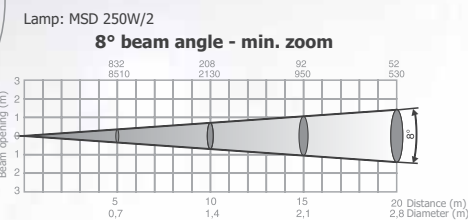

Dimensions:
Height = 353 mm (13.9")
Width = 409 mm (16.1")
Depth = 377 mm (14.8")
Weight - EU model: 13.5 kg (29.8 lbs)
Weight - US model: 16 kg (35.3 lbs)

- **Lamp:** MSD 250/2 compact high-pressure metal halide lamp, automatic and remote On/Off
- **Ballast:** Magnetic
- **Colour system:** Full CMY
- **Zoom:** Manual 8° - 22°
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Display:** 4-digit LED
- **Operation modes:** Stand-alone, DMX operation, Master/Slave
- **Control channels:** 8, 11 DMX
- **Optional Accessories:** Barn doors, remotable stand



ColorMix 240 AT



ROBE

www.robe.cz

HQ & Factory: ROBE Lighting s.r.o. ■ Házovice 2090 ■ 756 61 Rožnov p. Radhoštěm ■ Czech Republic ■ Tel.: +420-571-751 500 ■ Fax: +420-571-626 337 ■ E-mail: robe@robe.cz
UK: ROBE UK Ltd. ■ Northampton, UK ■ Tel.: 01604 741000 ■ E-mail: info@robeuk.com ■ America: ROBE Lighting Inc. ■ Florida, FL, USA ■ Tel.: (954) 615-9100 ■ E-mail: info@robelighting.com
South-East Asia: ROBE S.E.A. ■ Singapore ■ Tel.: +65-8118 6665 ■ E-mail: info@robe-sea.com

September © 2007 Robe Lighting s.r.o. All specifications subject to change without notice.

AT series

2007 / 2008

TUNGSTEN 750 AT TUNGSTEN 750 AT
7 0 0 COLOR WASH 700E AT 7 0 0
7 0 0 COLOR SPOT 700E AT 7 0 0
COLOR SPOT 700E AT TUNGSTEN 750 AT
COLOR WASH 700E AT

ROBE


ColorSpot 2500E AT

ColorWash 2500E AT




Lamp: MSR GOLD 1200 FastFit


Beam angle 10° - min. zoom

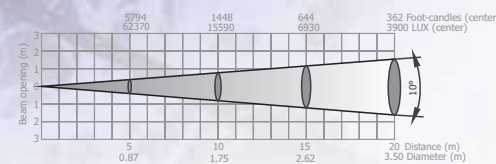


Beam angle 10° with frost

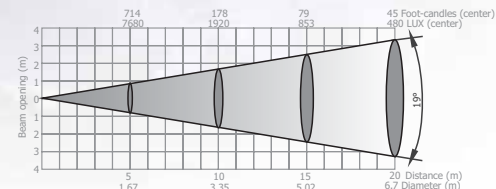


Beam angle 10° with frost, distance=5m

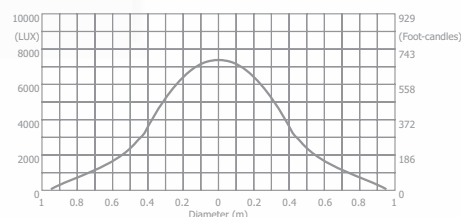


Beam angle 30° - max. zoom

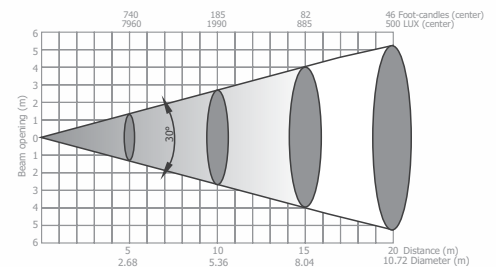

Beam angle 30° with frost

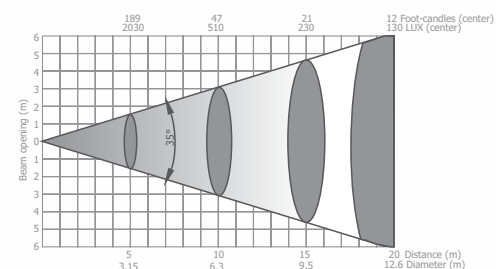


Beam angle 30° with frost, distance=5m

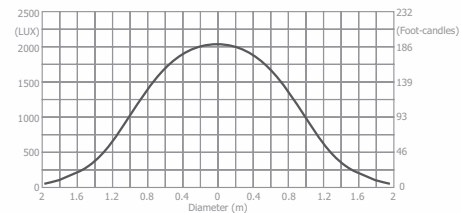


- Lamp:** MSR GOLD 1200 FastFit lamp (1400W, 6300K, 750hrs life), automatic and remote On/Off
- Ballast:** Electronic
- Colour System:** Full CMY + CTO
- Zoom:** Linear 10°-30°, motorized
- Colour wheel:** 6 replaceable "SLOT&LOCK" colours + open
- Gobo wheel 1:** 6 rotating, indexable, replaceable "SLOT&LOCK" dichroic glass gobos + open
- Gobo wheel 2:** 6 rotating, indexable, replaceable "SLOT&LOCK" dichroic glass gobos + open
- Gobo indexing, prism indexing:** 8- or 16-bit
- Effect wheel:** 4 rotating, indexable, replaceable "SLOT&LOCK" prisms and effect glasses + open
- Iris:** Motorized, stepless
- Frost effect:** Separate, variable
- Dimmer/Shutter:** Full range dimming and variable strobe effect
- Prism:** High-speed rotating 3 or 5-facet
- Focus:** 2m infinity, remotely controllable, motorized
- Pan/Tilt movement range:** Pan 530°, Tilt 260°, automatic Pan/Tilt position correction
- Pan/Tilt movement resolution:** 16-bit
- Setting & Addressing:** ROBE Navigation System (RNS)
- Display:** Blue/white LCD graphic with shuttle wheel
- Operation modes:** Stand-alone, DMX operation
- Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- Control channels:** 24 or 32, 3 protocol modes

Dimensions: Height = 638 mm (25.1"), Width = 542 mm (21.3"), Depth = 646 mm (25.4")
Weight = 42 kg (92.6 lbs)

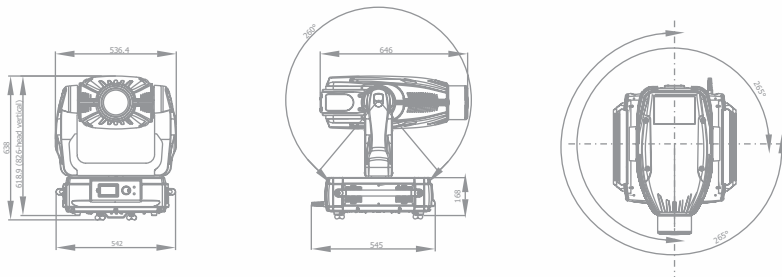


Lamp: MSR Gold 1200 FastFit


Beam angle 7° - Min. zoom




Distance=5m

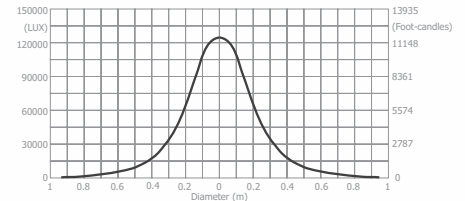

Beam angle 44° - Max. Zoom

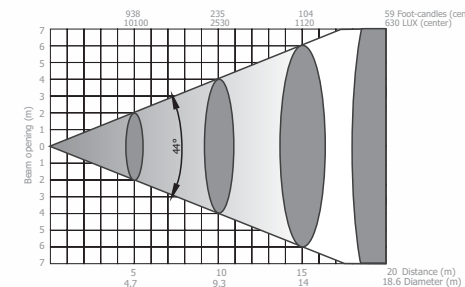


Distance=5m

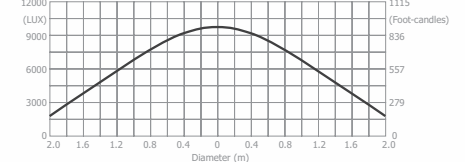








- Lamp:** MSR 1200 GOLD FastFit lamp (1400W, 6300K, 750hrs life), automatic and remote On/Off
- Ballast:** Electronic
- Colour System:** Full CMY + CTO
- Zoom:** Linear 7° - 44°, motorized
- Colour wheel 1:** 6 replaceable "SLOT&LOCK" colours + open
- Colour wheel 2:** 6 replaceable "SLOT&LOCK" colours + open
- Colour wheel 1, 2 positioning:** 8- or 16-bit
- Dimmer/Shutter:** Full range dimming and variable strobe effect
- Zoom and Dimmer resolution:** 8- or 16-bit
- Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- Pan/Tilt movement resolution:** 16-bit
- Setting & Addressing:** ROBE Navigation System (RNS)
- Display:** Blue/white LCD graphic with shuttle wheel
- Operation modes:** Stand-alone, DMX operation
- Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- Control channels:** 17, 21, 23, 24 or 30 DMX, 5 protocol modes

Dimensions: Height = 641 mm (25.2"), Width = 542 mm (21.3"), Depth = 545 mm (21.5")
Weight - ColorWash 2500E AT: 41 kg (90.4 lbs)

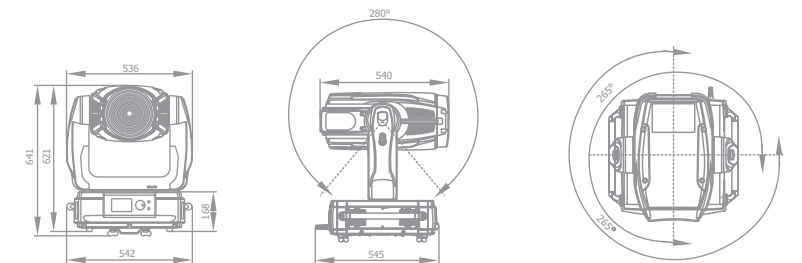





ColorSpot 1200 AT/1200E AT

ColorWash 1200E AT

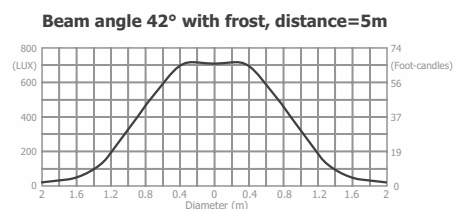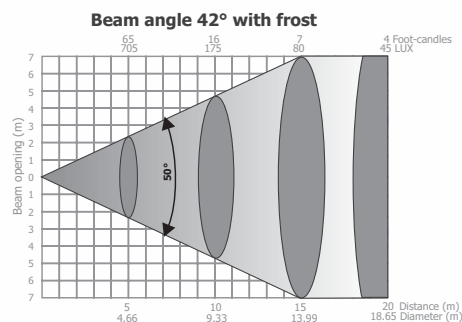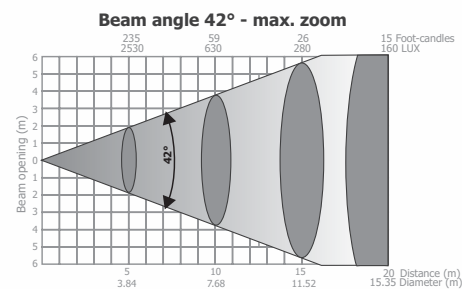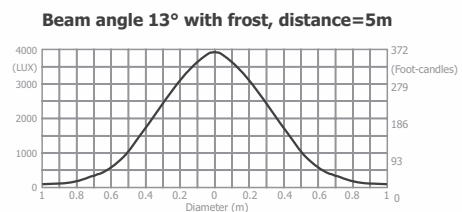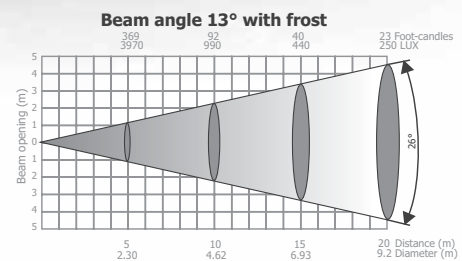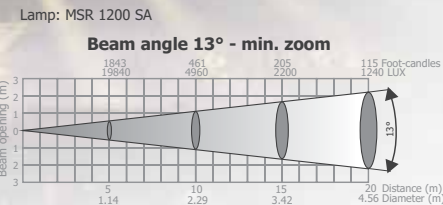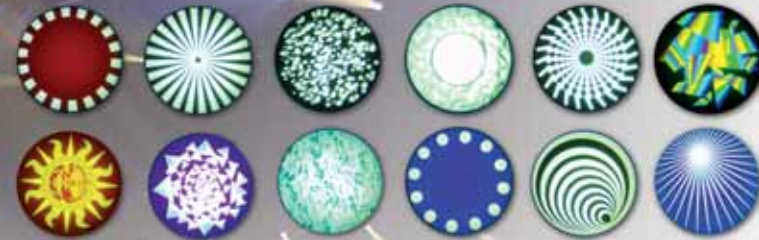


- **Lamp:** MSR 1200 SA discharge lamp (1200W, 6000K, 750hrs life), automatic and remote On/Off
- **Ballast:** Magnetic (ColorSpot 1200 AT)/Electronic (ColorSpot 1200E AT)
- **Colour System:** Full CMY + CTO
- **Zoom:** Linear 13° - 42°, motorized
- **Colour wheel:** 6 replaceable "SLOT&LOCK" colours + open
- **Gobo wheel 1:** 6 rotating, indexable, replaceable "SLOT&LOCK" dichroic filters + open
- **Gobo wheel 2:** 6 rotating, indexable, replaceable "SLOT&LOCK" dichroic filters + open
- **Gobo indexing, prism indexing:** 8- or 16-bit
- **Effect wheel:** 4 rotating, indexable, replaceable "SLOT&LOCK" prisms and effect glasses + open
- **Iris:** Motorized, stepless
- **Frost effect:** Separate, variable
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Prism:** High-speed rotating 3 or 5-facet
- **Focus:** 2m - infinity, remotely controllable, motorized
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Setting & Addressing:** ROBE Navigation System (RNS)
- **Display:** Blue/White LCD graphic with shuttle wheel
- **Operation modes:** Stand-alone, DMX operation
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- **Control channels:** 24 or 32 DMX, 3 protocol modes

Dimensions: Height = 638 mm (25.1"), Width = 536 mm (21.1"), Depth = 616 mm (24.3")
Weight - ColorSpot 1200 AT: 51.5 kg (113.5 lbs), Weight - ColorSpot 1200E AT: 42 kg (92.6 lbs)

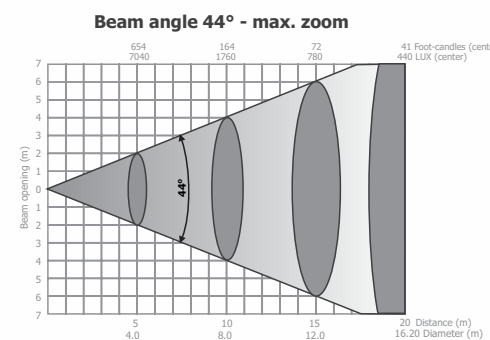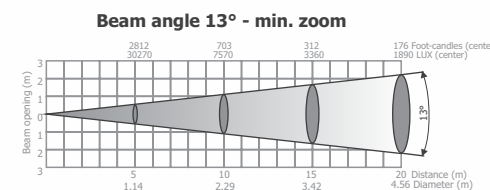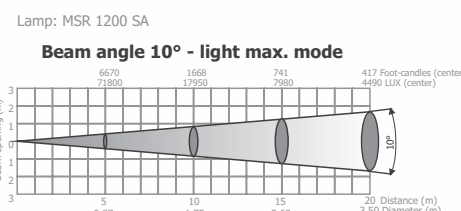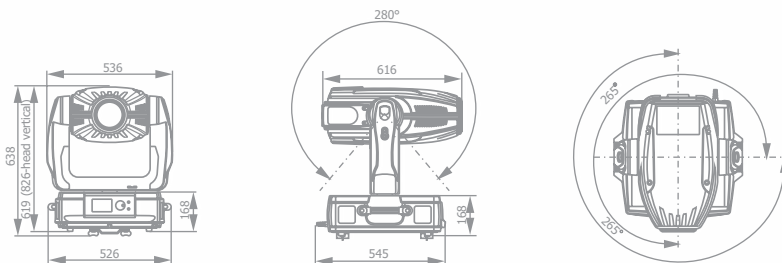

- **Lamp:** MSR 1200 SA discharge lamp (1200W, 6000K, 750hrs life), automatic and remote On/Off
- **Ballast:** Electronic
- **Colour System:** CMY + CTO
- **Zoom:** Linear motorized zoom of 10° - 44° or 68° - 87° depending on the lens type used
- **Colour wheel 1:** 6 replaceable "SLOT&LOCK" colours + open
- **Colour wheel 2:** 6 replaceable "SLOT&LOCK" colours + open
- **Colour wheel 1, 2 positioning:** 8- or 16-bit
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Zoom and Dimmer resolution:** 8- or 16-bit
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Setting & Addressing:** ROBE Navigation System (RNS)
- **Display:** Blue/White LCD graphic with shuttle wheel
- **Operation modes:** Stand-alone, DMX operation
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- **Control channels:** 17, 21, 23, 24 or 30 DMX, 5 protocol modes

Dimensions: Height = 641 mm (25.2"), Width = 536 mm (21.1"), Depth = 545 mm (21.5")
Weight: 41 kg (90.4 lbs)

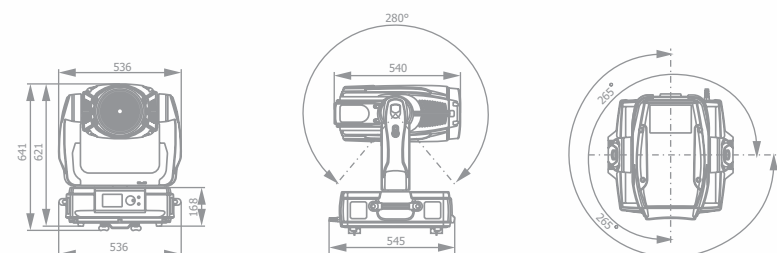

ColorSpot 700E AT



Optional gobos




Animation wheel



- **Lamp:** Philips MSR Gold 700™ FastFit (700W, 7500K, 750hrs life), automatic and remote On/Off
- **Ballast:** Electronic
- **Zoom:** Linear, motorized, range 15°- 51°, 8- or 16-bit resolution
- **Colour mixing system:** Full CMY + CTO
- **Colour wheel:** 7 replaceable "SLOT&LOCK" dichroic filters + open
- **Colour wheel positioning:** 8- or 16-bit
- **Gobo wheel 1 - static:** 9 replaceable "SLOT&LOCK" glass gobos + open
- **Static gobo wheel positioning:** 8- or 16-bit
- **Gobo wheel 2 - rotating:** 7 rotating, indexable, replaceable "SLOT&LOCK" glass gobos + open
- **Gobo rotation:** 8- or 16-bit
- **Animation wheel:** Replaceable, indexable, rotation in both directions at different speeds
- **Iris:** 8- or 16-bit, motorized, stepless
- **Focus:** 8- or 16-bit, motorized
- **Prism:** 3-facet indexable prism rotating in both directions at different speeds
- **Frost:** Separate, variable
- **Dimmer/Shutter:** Full range dimming and variable strobe effect, electronic strobbing "ZAP"
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°
- **Pan/Tilt resolution:** 16-bit
- **Setting & Addressing:** ROBE Navigation System (RNS)
- **Display:** Blue/white LCD graphic
- **Operation mode:** Stand-alone, DMX operation (support for RDM protocol)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- **Control channels:** 26, 28, 31, 34 or 36, 5 protocol modes
- **Fixation option:** Pan/Tilt-lock mechanism
- **Mounting points:** 4 pairs of ¼-turn locks for 2 Omega brackets

Dimensions: Height = 597 mm (23.5"), Width = 514 mm (20.2"), Depth = 499 mm (19.7")
Weight = 32 kg (70.5 lbs)






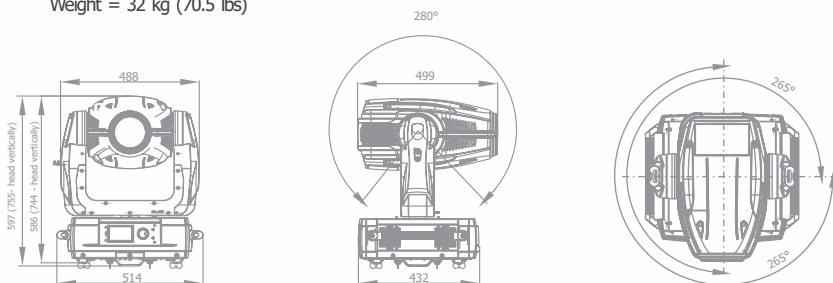


ColorWash 700E AT



- **Lamp:** Philips MSR Gold 700™ FastFit (700W, 7500K, 750hrs life), automatic and remote On/Off
- **Ballast:** Electronic
- **Colour mixing system:** Full CMY + CTO
- **Zoom:** Linear, motorized, range 6°-45°, 8- or 16-bit
- **Colour wheel:** 7 replaceable "SLOT&LOCK" dichroic filters + open
- **Colour wheel positioning:** 8- or 16-bit
- **Beam shaper:** Indexable, continuous rotation in both directions at different speeds, 8- or 16-bit
- **Dimmer/Shutter:** Full range dimming and variable strobe effect, electronic strobbing "ZAP"
- **Fixation option:** Pan/Tilt-lock mechanism
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°
- **Pan/Tilt resolution:** 16-bit
- **Setting & Addressing:** ROBE Navigation System (RNS)
- **Display:** Blue/white LCD graphic
- **Operation mode:** Stand-alone, DMX operation (support for RDM protocol)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- **Control channels:** 18, 20, 21, 22, 23 or 24 DMX, 6 protocol modes
- **Mounting points:** 4 pairs of ¼-turn locks for 2 Omega brackets

Dimensions: Height = 597 mm (23.5"), Width = 514 mm (20.2"), Depth = 499 mm (19.7")
Weight = 30.4kg (67 lbs)

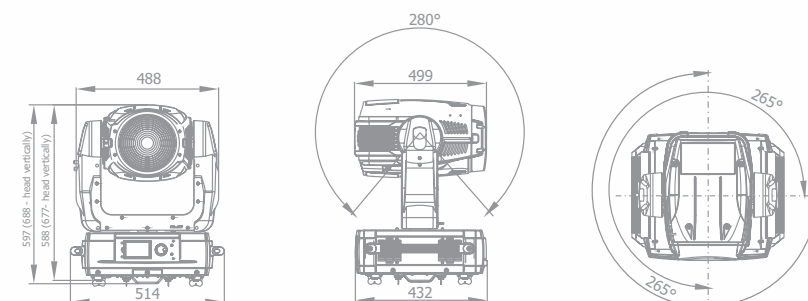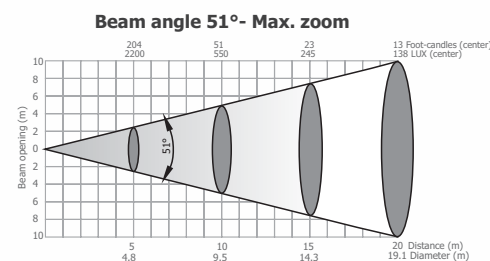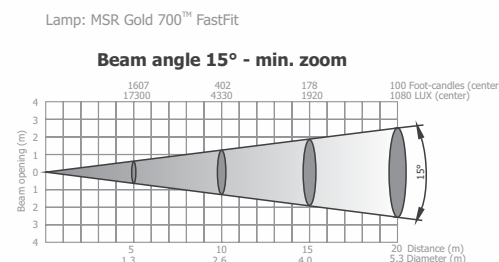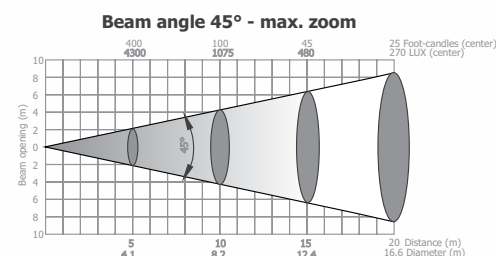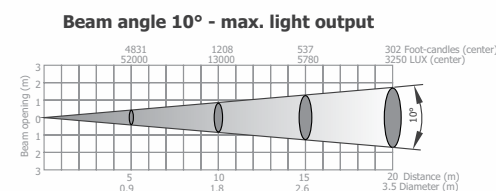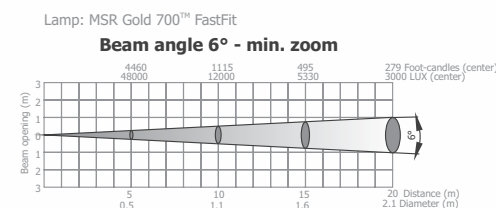


ColorWash 750 AT Tungsten






- **Lamp:** Philips Hi-Brite 750V FastFit (780W, 3250K, 300hrs life), automatic and remote On/Off
- **Colour System:** Full CMY
- **Zoom:** Linear, motorized, range 8° - 45°
- **Colour mixing system:** Full CMY + CTB
- **Effect wheel:** Rotating, indexable beam shaper, 8- or 16-bit resolution
- **Mechanical dimmer/Shutter:** Full range dimming and variable strobe effect
- **Electronic dimmer:** Full range fine dimming
- **Fixation option:** Pan/Tilt-lock mechanism
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°
- **Pan/Tilt resolution:** 16-bit
- **Mounting points:** 4 pairs of ¼-turn locks for 2 Omega brackets
- **Zoom and dimmer:** 8- or 16-bit
- **Setting & Addressing:** ROBE Navigation system (RNS)
- **Display:** Blue/white LCD graphic
- **Operation mode:** Stand-alone, DMX operation (support for RDM protocol)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN)
- **Control channels:** 18, 20, 21 or 23 DMX, 5 protocol modes

Dimensions: Height = 597 mm (23.5"), Width = 514 mm (20.24"), Depth = 499 mm (19.65")
Weight = 30.9 kg (68 lbs)

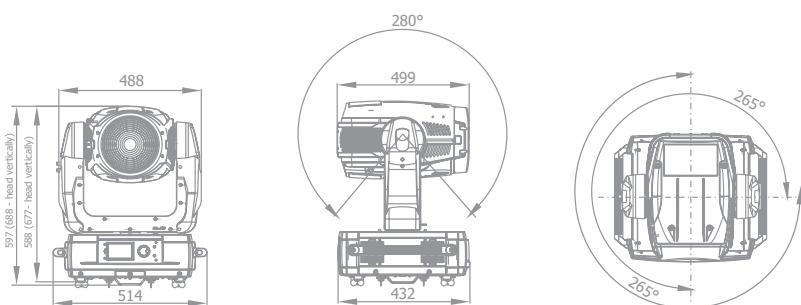







Lamp: Halogen lamp 750W/80V

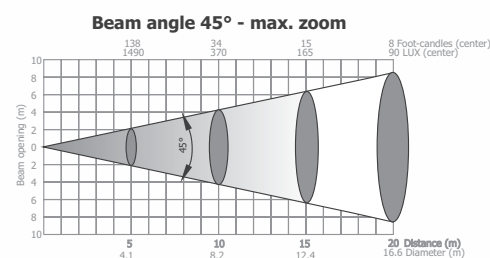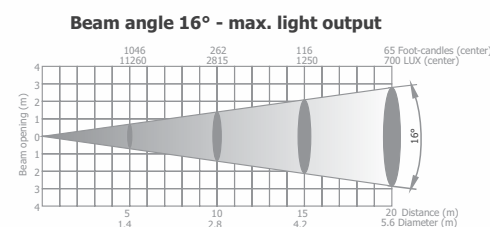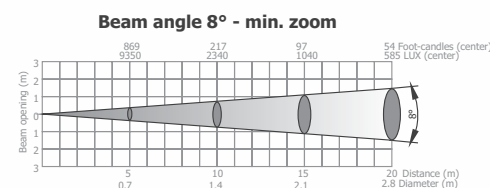

ColorSpot 575 AT/575E AT




Lamp: MSR 575/2

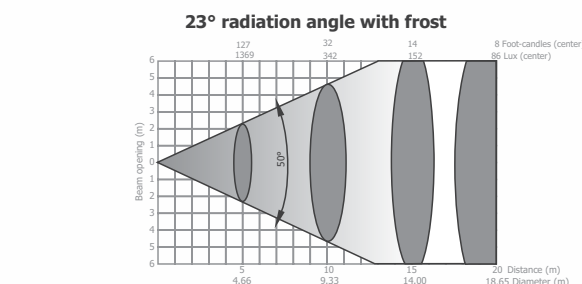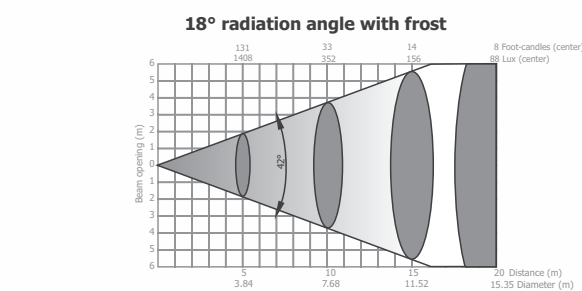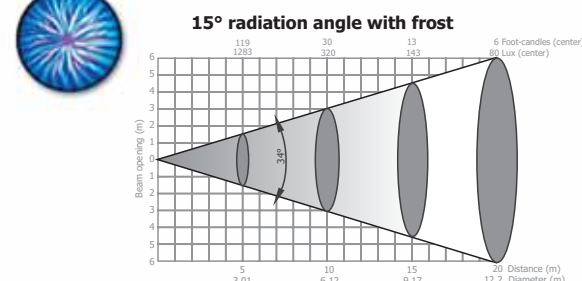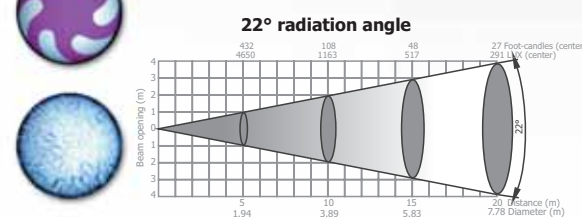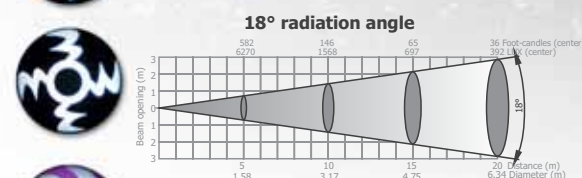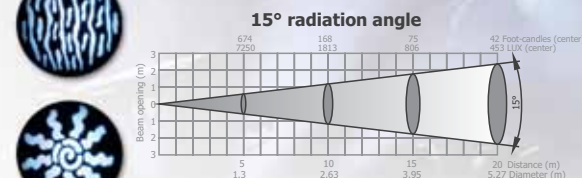

- **Lamp:** MSR 575/2 discharge lamp (575W, 7200K, 1000hrs life), automatic and remote On/Off
- **Ballast:** Magnetic (ColorSpot 575 AT)/Electronic (ColorSpot 575E AT)
- **Zoom:** Multi-step 15°, 18° and 22°, remotely adjustable
- **Colour wheel 1:** 9 dichroic filters + open, rainbow effect in both directions
- **Colour wheel 2:** 8 replaceable "SLOT&LOCK" dichroic filters + open, rainbow effect in both directions
- **Colour wheel 1, 2 positioning:** 8- or 16-bit
- **Gobo wheel 1 - static:** 9 replaceable "SLOT&LOCK" metal gobos + open
- **Gobo wheel 2 - rotating:** 7 rotating, indexable, replaceable "SLOT&LOCK" dichroic glass gobos + open
- **Static gobo positioning, rotating gobo indexing:** 8- or 16-bit
- **Iris:** Motorized, 8- or 16-bit
- **Focus:** Motorized, 8- or 16-bit
- **Prism:** Replaceable 3-facet prism rotating in both directions at different speeds
- **Frost:** Separate and variable, 8- or 16-bit
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Display:** 4-digit LED (ColorSpot 575 AT), blue/white LCD graphic with shuttle wheel (ColorSpot 575E AT)
- **Operation modes:** Stand-alone, DMX operation, Master/Slave (ColorSpot 575 AT only)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN) - ColorSpot 575E AT only
- **Control channels:** 19, 21, 27, 29 DMX, 4 protocol modes

Dimensions: Height = 574 mm (22.6"), Width = 470 mm (18.5"), Depth = 446 mm (17.6")
Weight - ColorSpot 575 AT: EU model = 32 kg (70.5 lbs), US model = 36 kg (79.4 lbs)
Weight - ColorSpot 575E AT: 26 kg (57.3 lbs)

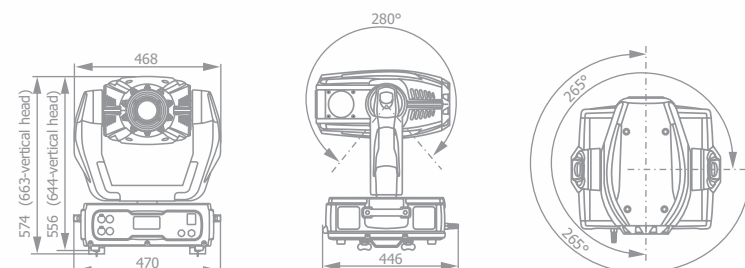


ColorWash 575 AT/575E AT

ColorWash 575 AT/575E AT Zoom




ColorWash 575AT - standard zoom range

Beam angle 12° - min. zoom

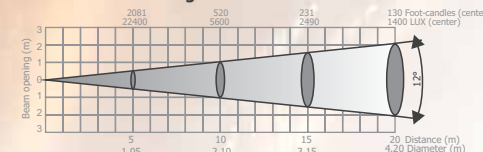


Beam angle 34° - max. zoom

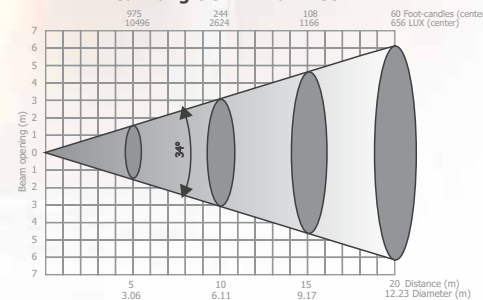


ColorWash 575AT - optional wide-angle lens (supplied only on request)

Beam angle 24° - min. zoom

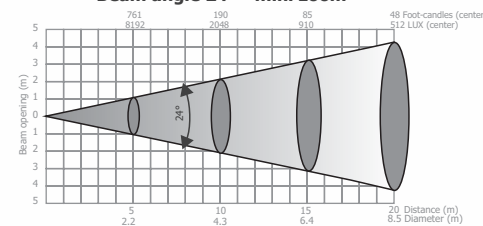


Beam angle 60° - max. zoom

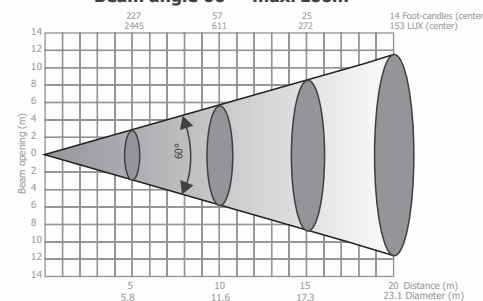


ColorWash 575AT - optional front wide-angle lens (supplied only on request)

Beam angle 87°

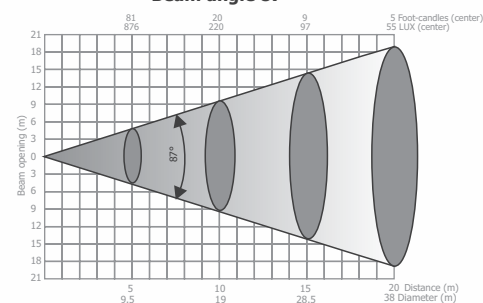


- **Lamp:** MSR 575/2 compact high-pressure metal lamp (575W, 7200K, 1000hrs life), automatic and remote On/Off
- **Ballast:** Magnetic (ColorWash 575AT) /Electronic (ColorWash 575E AT)
- **Colour System:** Full CMY + CTO
- **Zoom:** 12° - 34° standard, 24° - 60° with an optional lens supplied on request
- **Beam angle with optional front wide-angle lens (supplied on request):** 87°
- **Colour wheel:** 5 replaceable "SLOT&LOCK" colours + open
- **Colour wheel positioning:** 8- or 16-bit
- **Beam shaper:** 360° rotatable and indexable
- **Rotating beam shaper indexing:** 8- or 16-bit
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Zoom and Dimmer resolution:** 8- or 16-bit
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Display:** 4-digit LED (ColorWash 575AT), blue/white LCD graphic with shuttle wheel (ColorWash 575E AT)
- **Operation modes:** Stand-alone, DMX operation, Master/Slave (ColorWash 575 AT only)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN) - ColorWash 575E AT only
- **Control channels:** 18, 20, 22, 24 DMX, 4 protocol modes

Dimensions: Height = 588 mm (23.1"), Width = 470 mm (18.5"), Depth = 446 mm (17.6")
Weight - ColorWash 575 AT: EU model = 31 kg (68.3 lbs), US model = 34.5 kg (76.1 lbs)
Weight - ColorWash 575E AT: 28 kg (61.7 lbs)

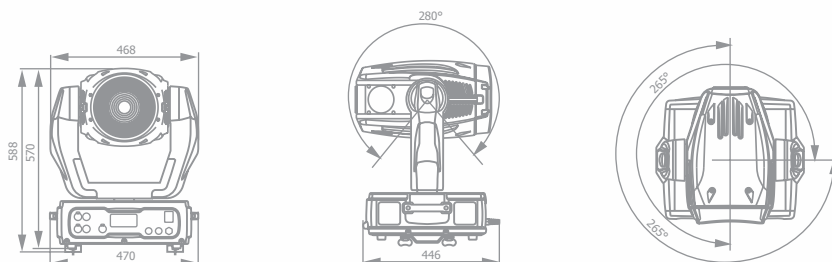


Lamp: MSR 575/2


Beam angle 8° - min. zoom

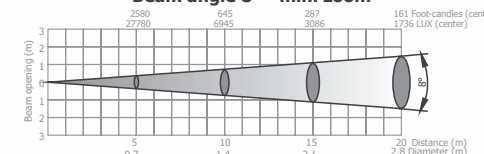


Distance=5m

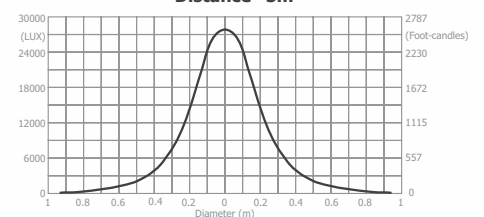

Beam angle 50° - max. zoom

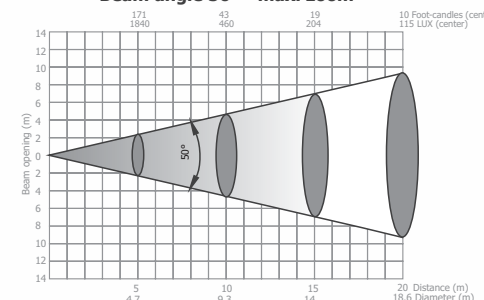


Distance=5m

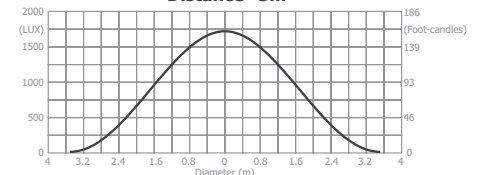

- **Lamp:** MSR 575/2 compact high-pressure metal lamp (575W, 7200K, 1000hrs life), automatic and remote On/Off
- **Ballast:** Magnetic (ColorWash 575AT Zoom)/Electronic (ColorWash 575E AT Zoom)
- **Colour System:** Full CMY + CTO
- **Zoom:** Linear 8° - 50°, motorized
- **Beam angle with optional front wide-angle lens (supplied on request):** 87°
- **Colour wheel:** 5 replaceable "SLOT&LOCK" colours + open
- **Colour wheel positioning:** 8- or 16-bit
- **Dimmer/Shutter:** Full range dimming and variable strobe effect
- **Zoom and Dimmer resolution:** 8- or 16-bit
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Display:** Blue/white LCD graphic with shuttle wheel
- **Operation modes:** Stand-alone, DMX operation, Master/Slave (ColorWash 575 AT Zoom only)
- **Connectivity:** DMX, Ethernet port (Art-Net protocol, ready for ACN) (ColorWash 575E AT Zoom only)
- **Control channels:** 16, 18, 19, 21 DMX, 4 protocol modes

Dimensions: Height = 588 mm (23.1"), Width = 470 mm (18.5"), Depth = 446 mm (17.6")
Weight - ColorWash 575 AT Zoom: EU model = 31 kg (68.3 lbs), US model = 34.5 kg (76.1 lbs)
Weight - ColorWash 575E AT Zoom: 28 kg (61.7 lbs)

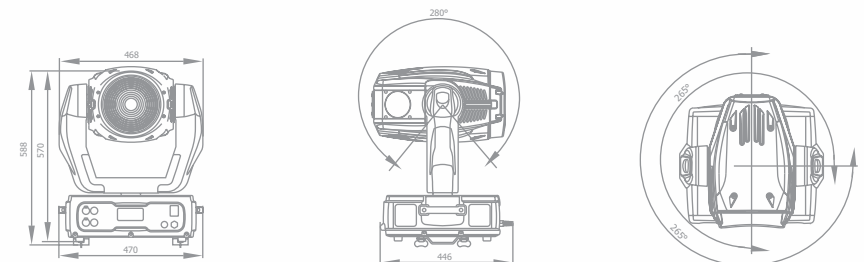






ColorSpot 250 AT

ColorWash 250 AT




- **Lamp:** MSD 250/2 discharge lamp (250W, 8500K, 3000hrs life), automatic and remote On/Off
- **Ballast:** Magnetic
- **Beam angle:** 15° standard, optional 12° and 18° objective
- **Colour wheel:** 10 replaceable "SLOT&LOCK" dichroic filters + open, rainbow effect in both directions
- **Gobo wheel:** 7 rotating, indexable, replaceable "SLOT&LOCK" glass gobos + open
- **Gobo indexing:** 8- or 16-bit
- **Focus:** Remotely controllable motorized
- **Prism:** 3-facet, high speed rotating, replaceable by frost filter
- **Dimmer/Shutter:** Combined mechanical, smooth micro-step driven dimming
- **Gobo indexing, Prism indexing:** 8- or 16-bit
- **Focus, Dimmer:** 8- or 16-bit
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Display:** 4-digit LED
- **Operation modes:** Stand-alone, DMX operation, Master/Slave
- **Control channels:** 14, 16, 18, 20 DMX, 4 protocol modes

Dimensions: Height = 494 mm (19.4"), Width = 419 mm (16.5"), Depth = 438 mm (17.2")
Weight: EU model = 20.5 kg (45.2 lbs), US model = 23.5 kg (51.8 lbs)

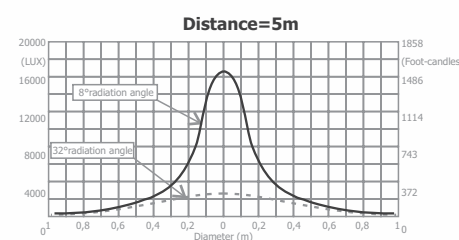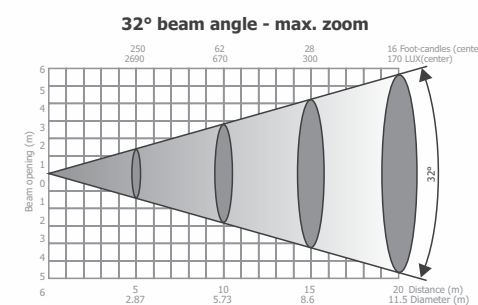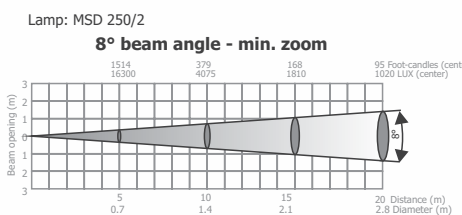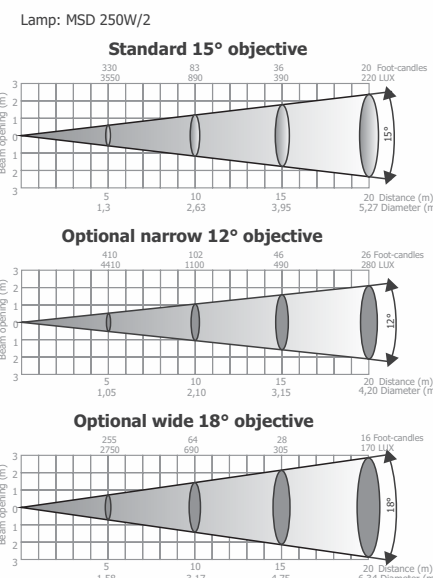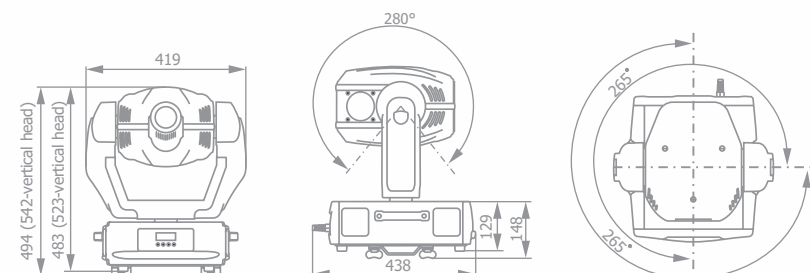


- **Lamp:** MSD 250/2 discharge lamp (250W, 8500K, 3000hrs life), remote On/Off
- **Ballast:** Magnetic
- **Colour System:** Full CMY
- **Zoom:** Motorized zoom effect 8° - 32°
- **Colour wheel:** Red, green, blue, 3200K, 5600K CT and UV filter, rainbow effect in both directions
- **Effect wheel:** Beam shaper, frost filter
- **Shutter:** Separate for black-out and variable strobing
- **Dimmer:** Very smooth micro-step driven dimming
- **Pan/Tilt movement range:** Pan 530°, Tilt 268°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 16-bit
- **Display:** 4-digit LED
- **Operation modes:** Stand-alone, DMX operation, Master/Slave
- **Control channels:** 16, 18, 20 DMX, 4 protocol modes

Dimensions: Height = 513 mm (20.2"), Width = 419 mm (16.5"), Depth = 438 mm (17.2")
Weight: EU model = 20.5 kg (45.2 lbs), US model = 23.5 kg (51.8 lbs)

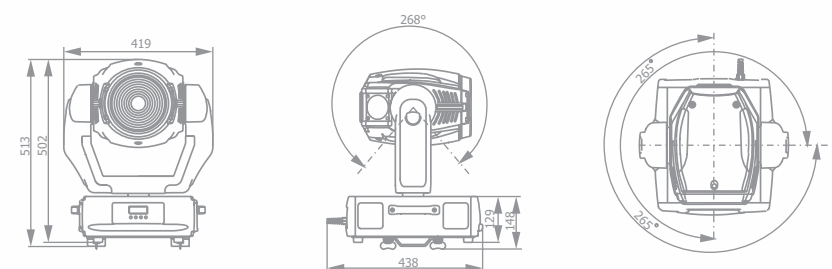

ColorSpot 170 AT

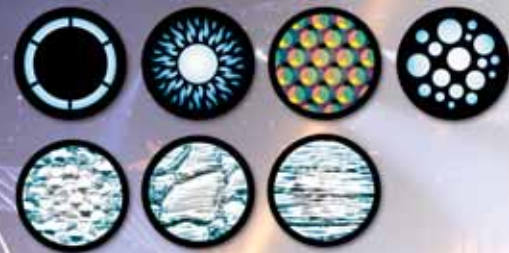

- **Lamp:** CDM-SA/T 150/942 discharge lamp (150W, 4200K, 6000hrs life), automatic and remote On/Off
- **Ballast:** Magnetic
- **Beam angle:** 19°
- **Colour wheel:** 10 replaceable "SLOT&LOCK" dichroic colours + open, rainbow effect in both directions
- **Gobo wheel:** 7 rotating, indexable, replaceable "SLOT&LOCK" gobos + open position, continuous rotation in both directions
- **Shutter:** Separate for black-out and strobe effect, 1-9 flashes per sec.
- **Pan/Tilt movement range:** Pan 530°, Tilt 280°, automatic Pan/Tilt position correction
- **Pan/Tilt movement resolution:** 8- or 16-bit
- **Display:** 4-digit LED
- **Operation modes:** Stand-alone, DMX operation, Master/Slave
- **Control channels:** 10, 12, 16 DMX, 4 protocol modes

Dimensions:
Height = 416 mm (16.4")
Width = 326 mm (12.8")
Depth = 362 mm (14.3")

Weight - EU model: 11 kg (24.3 lbs)
Weight - US model: 13 kg (28.7 lbs)

