

**BOSCH**  
Invented for life

# LB1-UW06-Fx Cabinet Loudspeakers



- ▶ Good speech intelligibility and background music reproduction
- ▶ Finished in white or black
- ▶ MDF construction
- ▶ Mounting brackets for wall or ceiling mounting
- ▶ Complies with international installation and safety regulations

The LB1-UW06-Fx is a 6 W, general-purpose, cost-effective loudspeaker for indoor use. Two brackets, fixed to the rear panel, are provided for quick and easy mounting on a wall or ceiling. The cabinet is available in the colors black or white.

## Functions

The robust, solid MDF (medium density fiberboard) enclosures are covered with a durable, easy-to-clean vinyl in a choice of white or black. The ABS fronts are covered with fine woven cloth in matching color.

## Certifications and Approvals


All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures extra reliability under extreme conditions, leading to higher customer satisfaction, longer operating life, and much less chance of failure or performance deterioration.

Safety


acc. to EN 60065

## Installation/Configuration Notes


Two mounting brackets, fixed to the rear panel provide easy and quick wall mounting or ceiling mounting. If these are not desired, they can be removed, and the unit can still be wall mounted using the three keyholes in the rear panel. A convenient, easy-to-use, 4-pole push-in terminal block is on the rear panel for on-site wiring. This terminal block has provision for power tapping on the 100 volt matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter-power radiation (in 3 dB steps).

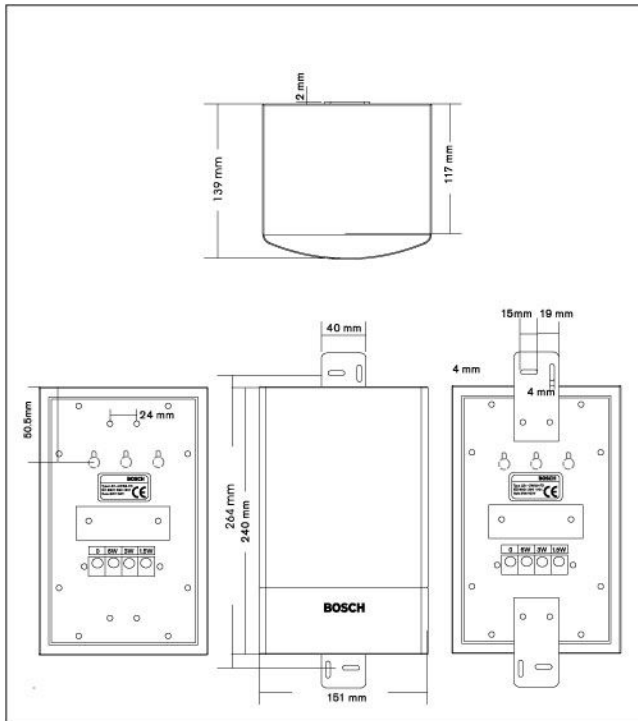


Dimensions in mm

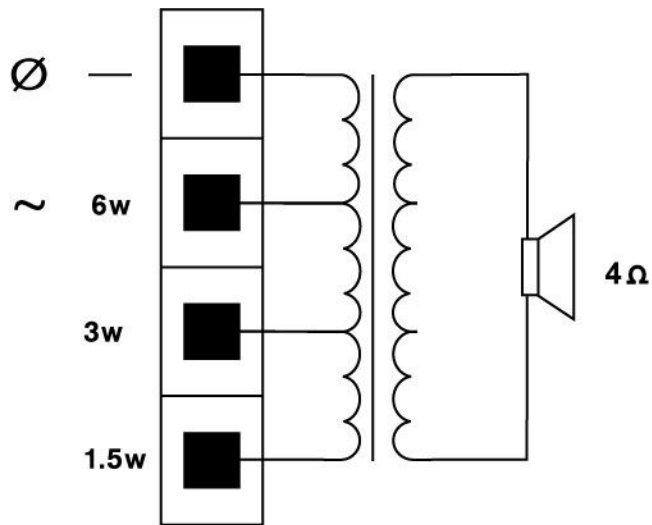


Circuit diagram

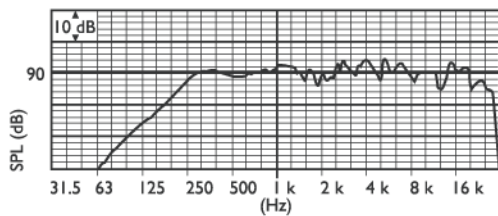

Frequency response

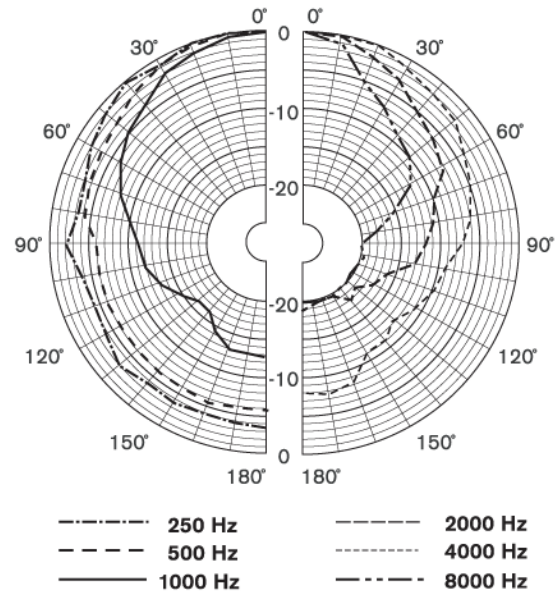

Polar diagram horizontal (measured with pink noise)

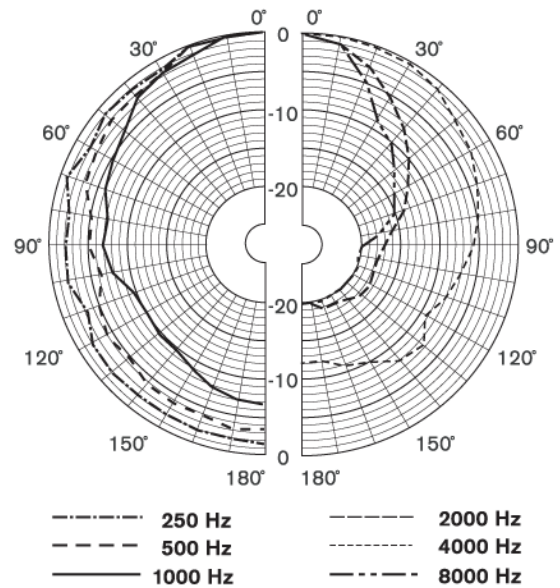

Polar diagram vertical (measured with pink noise)

## Technical Specifications

### Electrical\*

Maximum power	9 W
Rated power	6 / 3 / 1.5 W
Sound pressure level at 6 W / 1 W (1 kHz, 1 m)	99 dB / 91 dB (SPL)
Effective frequency range (-10 dB)	180 Hz to 20 kHz
Opening angle horizontal	1 kHz / 4 kHz (-6 dB) 165° / 95°
vertical	158° / 73°
Rated input voltage	100 V
Rated impedance	1667 ohm
Connector	4-pole push-in terminal block

\* Technical performance data acc. to IEC 60268-5

### Mechanical

Dimensions (H x W x D)	240 x 151 x 139 mm (9.4 x 5.9 x 5.5 in)
Weight	1.5 kg (3.3 lb)
Color cabinet / cloth (D)	Black (D) or white (L) Matches RAL 9004 / RAL 9004
cabinet / cloth (L)	Matches RAL 9010 / RAL 7044

### Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

## Ordering Information

LB1-UW06-FD Unidirectional Cabinet Loudspeaker 6 W, black	LB1-UW06-FD
LB1-UW06-FL Unidirectional Cabinet Loudspeaker 6 W, white	LB1-UW06-FL

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**