







Bedienungsanleitung
Instructions for use
Notice d'emploi
Istruzioni per l'uso
Instrucciones para el uso
Gebruiksaanwijzing

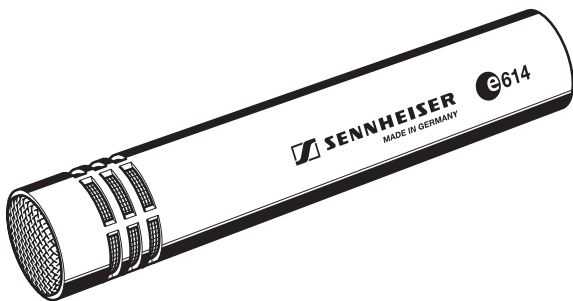

| | |
|--------------------------------|----|
| Bedienungsanleitung..... | 3 |
| Instructions for use | 9 |
| Notice d'emploi | 15 |
| Istruzioni per l'uso..... | 21 |
| Instrucciones para el uso..... | 27 |
| Gebruiksaanwijzing..... | 33 |

614

The super-cardioid  614 is a pre-polarised condenser microphone designed for demanding applications which require a wide frequency response, high sound pressure level, fast transient response and a compact design. With its frequency response of 40 Hz to 20 kHz, the  614 is able to capture the full sound of the instrument, while its super-cardioid pick-up pattern isolates the microphone from other on-stage signals.

An excellent microphone for overheads, hi-hat and percussions, the  614 is also an ideal choice for woodwind and string instruments. Its excellent acoustic properties also make it a valuable tool for home recording, the project studio and live stereo pair recording.


Features

- Rugged design
- Excellent directivity across the whole frequency range
- Full, natural sound
- High maximum sound pressure level
- Wide frequency response

Delivery includes



- e614 microphone
- Pouch
- MZQ 100 microphone clamp
- Instructions for use
- Warranty Certificate

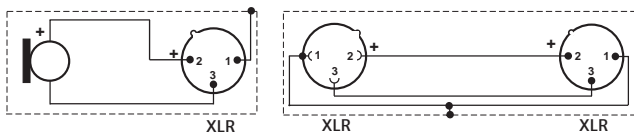Pin assignment of XLR-3 connector




Positioning the microphone

Drums / Percussions


| Position | Resulting sound | Commentary |
|--|------------------------------------|---|
|  | Natural, clear sound | <p>Position the microphone a few centimetres above the outer edge of the hi-hat aiming down. If necessary, remove unwanted low-frequency signal portions by high pass filtering.</p> <p>Attention: When closing the hi-hat, a strong air current is created on the edge. If the microphone is positioned too close to the edge, interfering noise due to the air current can occur.</p> |
|  | More fundamental, little overtones | |

In order to prevent interference due to crosstalk between adjacent sound sources, try to position the microphone so that the interfering sound source is located in the angle area of the highest cancellation of the microphone (approx. 135°; see polar diagram)

Polar diagram

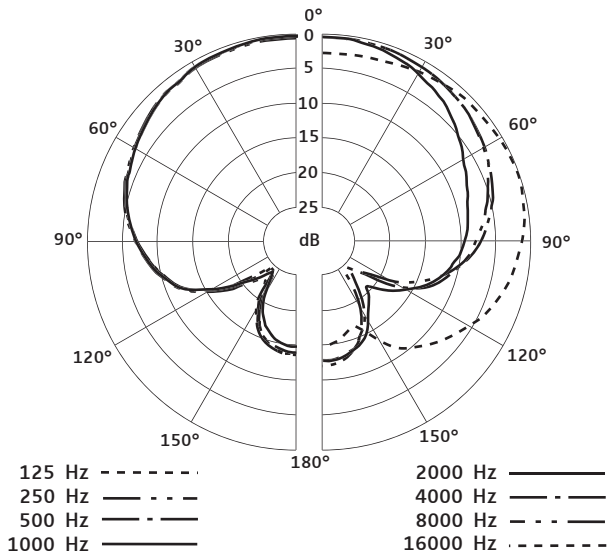

Frequency response curve

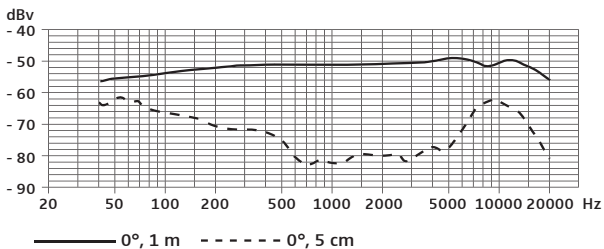

Specifications

| | |
|---|---------------------------------------|
| Transducer principle | pre-polarised condenser microphone |
| Frequency response | 40....20,000 Hz |
| Pick-up pattern | super-cardioid |
| Sensitivity (free field, no load at 1 kHz) | 3 mV/Pa |
| Max. sound pressure level at 1 kHz | 139 dB/SPL |
| Nominal impedance | 50 Ω |
| Min. terminating impedance | 1 k Ω |
| Phantom powering | 12 – 52 V / 3 mA |
| Connector | XLR-3 |
| Dimensions | \emptyset 20 mm, L 100 mm |
| Weight | 93 g |

Overview of microphone applications

| Application | Variant | | | | | | | | | | |
|---------------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| | e602 | e604 | e606 | e608 | e614 | e815 | e825 | e835 | e840 | e845 | e865 |
| Vocals | | | | | | x | x | x | x | x | x |
| Choirs | | | | | x | | | | | | |
| Studio, acoustic instruments | | | | | x | | | | | | |
| Orchestra | | | | | x | | | | | | |
| Brass / Saxophone | x | x | | x | | | | | | | |
| Acoustic guitar | | | | | x | | | | | | |
| Acoustic bass | | | | | x | | | | | | |
| Guitar amplifiers | | | x | | | | | | | | |
| Bass amplifiers | x | | | | | | | | | | |
| Leslie | x | x | x | | | | | | | | |
| Piano, grand piano | | | | | x | | | | | | |
| Kick drums | x | | | | | | | | | | |
| Snare drums | | x | x | x | | | | | | | |
| Rack toms | | x | x | x | | | | | | | |
| Floor toms | x | x | x | | | | | | | | |
| Congas | | x | x | x | | | | | | | |
| Cymbals | | | | | x | | | | | | |
| Percussion | | x | x | x | x | | | | | | |
| Overheads | | | | | x | | | | | | |



Konformitätserklärung

Sennheiser electronic GmbH & Co. KG erklären, dass dieses Gerät die anwendbaren CE-Normen und Vorschriften erfüllt.

Approval

Sennheiser electronic GmbH & Co. KG declare that this device is in compliance with the applicable CE standards and regulations.

Certification

Sennheiser electronic GmbH & Co. KG déclarons que cet appareil est en conformité avec les normes CE.

Certificazione

Sennheiser electronic GmbH & Co. KG dichiara che questo apparecchio risponde alle normative e alle prescrizioni CE applicabili.

Autorizacion

Sennheiser electronic GmbH & Co. KG declara que este aparato cumple las normas y directrices de la CE aplicables.

Vergunning

Sennheiser electronic GmbH & Co. KG verklaren, dat dit toestel voldoet aan de toepasselijke CE-normen en voorschriften.

Diese Service-Nummer gilt nur für Deutschland




K.I.S.S.

Kunden-Information-System-Sennheiser

0180 / 5221 539

0,12 € je Minute

Montag -Freitag: 8.00 Uhr - 18.00 Uhr



Sennheiser electronic GmbH & Co. KG
30900 Wedemark, Germany
Phone +49 (5130) 600 0
Fax +49 (5130) 600 300
www.sennheiser.com